

DART SERVICE INSTRUCTION

TO AMEND DRAWING D350-607 REV. F OR SUBSEQUENT APPROVED REVISION

REF CANADIAN STC: SH94-14

FAA STC: SR00213NY

EASA STC: EASA.IM.R.S.01405

THE PURPOSE OF THIS DART SERVICE INSTRUCTION (DSI), IS TO PROVIDE OPERATORS OF AS350 / 355 ROTORCRAFT EQUIPPED WITH DART D350-607-041 HELI UTILITY BASKETS WITH AN UPGRADE KIT TO REPLACE THE EXISTING LID PROP ARM WITH 2 GAS SPRINGS.

FOR OPERATORS EQUIPPED WITH D350-607-043/-045/-047 HELI UTILITY BASKETS THIS DSI WILL PROVIDE AN UPGRADE KIT TO REPLACE THE EXISTING LID PROP ARM WITH 1 GAS SPRING.

ITEM No.	QTY -141	QTY -143	QTY -145	PART NUMBER	DESCRIPTION
1	X			D350-607-141	AUTOMATIC LID OPENER INSTL (FOR USE ON -041 BASKET*)
2		X		D350-607-143	AUTOMATIC LID OPENER INSTL (FOR USE ON -043/-047 BASKET*)
3			X	D350-607-145	AUTOMATIC LID OPENER INSTL (FOR USE ON -045 BASKET*)
4	2		1	D3953-1	GAS SPRING BRACKET
5	2	1	1	D3953-3	GAS SPRING STUD (LID)
6	2	1	1	D3953-5	GAS SPRING STUD (BASE)
7	2	1	1	D3953-7	GAS SPRING SPACER
8	4	2	2	D3953-9	GAS SPRING WASHER
9	2	1	1	D3953-11	GAS SPRING SPACER
10	2		1	D3953-13	GAS SPRING SPACER
11		1		D3953-15	GAS SPRING BRACKET
12		1		D3953-17	GAS SPRING SPACER
13	2	1	1	D3969-1	GAS SPRING
14	4	2	2	AN3C11A	BOLT
15		2		AN3C15A	BOLT
18	4		2	AN3C16A	BOLT
19	4	2	2	AN310-4	CASTELLATED NUT
20	8	4	4	MS21043-3	NUT
21	4	2	2	MS24665-212	COTTER PIN
22	8	4	4	NAS1149C0332R	WASHER (OR AN960C10L)
23	4	2	2	NAS1149C0432R	WASHER (OR AN960C416L)

***NOTE:** FOR CUSTOMERS WISHING TO ORDER NEW BASKETS WITH THE LID OPENER PRE-INSTALLED USE THE FOLLOWING NUMBERS:

D350-607-041 BASKET WITH AUTOMATIC LID OPENER INSTALLED = D350-607-041A

D350-607-043 BASKET WITH AUTOMATIC LID OPENER INSTALLED = D350-607-043A

D350-607-045 BASKET WITH AUTOMATIC LID OPENER INSTALLED = D350-607-045A

D350-607-047 BASKET WITH AUTOMATIC LID OPENER INSTALLED = D350-607-047A

CANADA DEPARTMENT OF TRANSPORT AIRCRAFT CERTIFICATION BRANCH DAO # 01-O-01	
APPROVED	
BY:	
D. SHEPHERD (DE # 02)	
DATE: 09.11.11	
CERT. NO.: SH94-14	
ISSUE NO.: 4	

C	SHEET 1 PL, -143 INSTL, ITEM 6 QTY WAS 2, ITEM 7 WAS 0.	AJS	09.11.11
B	SHT 1 P/L ITEM 22 WAS NAS1149C0332 ITEM 23 WAS NAS1149C0432H. ALL OTHER SHEETS UPDATED ACCORDINGLY. (REASON: DRAFTING ERROR) INSTALLATIONS RENAMED.	AJS	09.11.06
A	NEW ISSUE	AJS	09.09.15
REV.	DESCRIPTION	BY	DATE
DESIGN	AJS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED		REV. C SHEET 1 OF 8	
MFG. APPR.	N/A		
APPROVED		SCALE NTS	
DE APPR.			
DATE	09.11.11	COPYRIGHT © 2009 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

FOR D350-607-041 BASKETS, REPLACE THE EXISTING D2332-041 PROP ARM ASSEMBLY AS FOLLOWS:

D350-607-141 AUTOMATIC LID OPENER INSTALLATION

NOTE: ONCE THIS MODIFICATION IS COMPLETE YOU WILL NOT BE ABLE TO RE-INSTALL THE D2332-041 PROP ARM.




- 1) REMOVE THE D2332-041 PROP ARM.
 - 2) GRIND FLUSH THE D2327-3 SPACER BUSHING ON BOTH ENDS OF THE BASKET AS SHOWN IN FIGURE 1 (IT IS PERMISSIBLE TO GRIND ALL 4 SPACERS FLUSH). TOUCH UP PAINT PER ICA-D350-607 REV. 0 SECTION 5.1 ITEM 4.
 - 3) LOCATE THE D3953-1 GAS SPRING BRACKET AS SHOWN IN FIGURE 1. TRIM STEEL MESH LOCALLY AS REQUIRED. TOUCH UP PAINT PER ICA-D350-607 REV. 0 SECTION 5.1 ITEM 4. TRANSFER MARK AND DRILL 2X Ø0.194 HOLES THRU THE BASKET LID SQUARE TUBE STRUCTURE AS SHOWN IN DETAIL A. INSTALL THE D3953-1 GAS SPRING BRACKET & D3953-13 GAS SPRING SPACER USING 2X AN3C16A BOLT, 2X NAS1149C0332R WASHER & 2X MS21043-3 NUT AS SHOWN IN VIEW E-E.
 - 4) LOCATE THE D3953-5 GAS SPRING STUD AS SHOWN IN FIGURE 1. TRIM STEEL MESH LOCALLY AS REQUIRED. TOUCH UP PAINT PER ICA-D350-607 REV. 0 SECTION 5.1 ITEM 4. TRANSFER MARK AND DRILL 2X Ø0.194 HOLES THRU THE BASKET BASE SQUARE TUBE STRUCTURE AS SHOWN IN DETAIL B. FASTEN D3953-5 IAW VIEW F-F USING 2X AN3C11A BOLT, 2X NAS1149C0332R WASHER & 2X MS21043-3 NUT.
 - 5) INSTALL 1X D3953-11 GAS SPRING SPACER ONTO THE D3953-5 STUD AS SHOWN IN VIEW F-F. INSTALL THE LARGE END OF THE D3969-1 GAS SPRING SPRING ONTO THE D3953-5 GAS SPRING STUD AND FASTEN IN PLACE USING 1X D3953-9 GAS SPRING WASHER, 1X NAS1149C0432R WASHER, 1X AN310-4 CASTELATTED NUT & 1X MS24665-212 COTTER PIN AS SHOWN IN VIEW F-F. INSTALL COTTER PIN PER MS33540 OR AC43.13 CHAPTER 7-127.
 - 6) INSERT THE D3953-3 GAS SPRING STUD INTO THE D3953-1 GAS SPRING BRACKET & INSERT THE D3953-7 GAS SPRING SPACER ONTO THE D3953-3 GAS SPRING AS SHOWN IN VIEW E-E. RAISE THE BASKET LID AND INSTALL THE ROD END OF THE D3969-1 GAS SPRING ONTO THE D3953-3 GAS SPRING STUD USING 1X D3953-9 GAS SPRING WASHER, 1X NAS1149C0432R WASHER, 1X AN310-4 CASTELATTED NUT & 1X MS24665-212 COTTER PIN AS SHOWN IN VIEW E-E. INSTALL COTTER PIN PER MS33540 OR AC43.13 CHAPTER 7-127.
- NOTE:** THE D3953-3 GAS SPRING STUD CAN BE HELD IN PLACE WITH A $\frac{9}{16}$ OPEN END SPANNER / WRENCH.
- NOTE:** WITH THE LID IN THE CLOSED POSITION THE GAS SPRING SHOULD NOT BE FULLY COMPRESSED.
- 7) REPEAT STEPS 2 THROUGH 6 AT THE OTHER END OF THE BASKET.
 - 8) TEST THE INSTALLATION. IF INSTALLED PROPERLY THE GAS SPRINGS SHOULD ASSIST THE BASKET USER IN BOTH OPENING AND CLOSING THE BASKET LID.

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED

BY: 
D. SHEPHERD (DE # 02)

DATE: 09.11.11
CERT. NO.: SH94-14
ISSUE NO.: 4

DESIGN	AJS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED		DRAWING NO.	REV. C
MFG. APPR.	N/A	DSI 9473	SHEET 2 OF 8
APPROVED		TITLE	SCALE
DE APPR.		AUTOMATIC LID OPENER INSTL	NTS
DATE 09.11.11		COPYRIGHT © 2009 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

FOR D350-607-043/-047 BASKETS REPLACE THE EXISTING D2332-041 PROP ARM ASSEMBLY AS FOLLOWS:

D350-607-143 AUTOMATIC LID OPENER INSTALLATION

NOTE: THIS KIT MAY BE INSTALLED AT EITHER END OF THE BASKET. HOWEVER, THE PROP ARM MUST BE REMOVED IN EITHER CASE AS IT WILL INTERFERE WITH THE FUNCTION OF THE GAS SPRING.




- 1) REMOVE THE D2332-041 PROP ARM.
 - 2) GRIND FLUSH THE D2327-3 SPACER BUSHING ON THE END OF THE BASKET WHERE THE LID OPENER IS BE INSTALLED AS SHOWN IN FIGURE 2 (IT IS PERMISSIBLE TO GRIND ALL 4 SPACERS FLUSH). TOUCH UP PAINT PER ICA-D350-607 REV. 0 SECTION 5.1 ITEM 4.
 - 3) LOCATE THE D3953-15 GAS SPRING BRACKET AS SHOWN IN FIGURE 2. TRIM STEEL MESH LOCALLY AS REQUIRED. TOUCH UP PAINT PER ICA-D350-607 REV. 0 SECTION 5.1 ITEM 4. TRANSFER MARK AND DRILL 2X Ø0.194 HOLES THRU THE BASKET LID SQUARE TUBE STRUCTURE AS SHOWN IN DETAIL C. INSTALL THE D3953-15 GAS SPRING BRACKET & D3953-17 GAS SPRING SPACER USING 2X AN3C15A BOLT, 2X NAS1149C0332R WASHER & 2X MS21043-3 NUT AS SHOWN IN VIEW G-G.
 - 4) LOCATE THE D3953-5 GAS SPRING STUD AS SHOWN IN FIGURE 2. TRIM STEEL MESH LOCALLY AS REQUIRED. TOUCH UP PAINT PER ICA-D350-607 REV. 0 SECTION 5.1 ITEM 4. TRANSFER MARK AND DRILL 2X Ø0.194 HOLES THRU THE BASKET BASE SQUARE TUBE STRUCTURE AS SHOWN IN DETAIL D. INSTALL 2X AN3C11A BOLT, 2X NAS1149C0332R WASHER & 2X MS21043-3 NUT AS SHOWN IN VIEW H-H. INSTALL THE ROD END OF THE D3969-1 GAS SPRING ONTO THE D3953-3 GAS SPRING STUD USING 1X D3953-9 GAS SPRING WASHER, 1X NAS1149C0432R WASHER, 1X AN310-4 CASTELATTED NUT & 1X MS24665-212 COTTER PIN AS SHOWN IN VIEW H-H. INSTALL COTTER PIN PER MS33540 OR AC43.13 CHAPTER 7-127.
 - 5) INSERT THE D3953-3 GAS SPRING STUD INTO THE D3953-15 GAS SPRING BRACKET & INSERT THE D3953-7 GAS SPRING SPACER ONTO THE D3953-3 GAS SPRING STUD AS SHOWN IN VIEW G-G. RAISE THE BASKET LID AND INSTALL THE D3969-1 GAS SPRING ONTO THE D3953-3 GAS SPRING STUD AND FASTEN IN PLACE USING 1X D3953-9 GAS SPRING WASHER, 1X NAS1149C0432R WASHER, 1X AN310-4 CASTELATTED NUT & 1X MS24665-212 COTTER PIN AS SHOWN IN VIEW G-G. INSTALL COTTER PIN PER MS33540 OR AC43.13 CHAPTER 7-127.
- NOTE:** THE D3953-3 GAS SPRING STUD CAN BE HELD IN PLACE WITH A $\frac{9}{16}$ OPEN END SPANNER / WRENCH.
- NOTE:** WITH THE LID IN THE CLOSED POSITION THE GAS SPRING SHOULD NOT BE FULLY COMPRESSED.
- 6) TEST THE INSTALLATION. IF INSTALLED PROPERLY THE GAS SPRING SHOULD ASSIST THE BASKET USER IN BOTH OPENING AND CLOSING THE BASKET LID.

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED

BY: 
D. SHEPHERD (DE # 02)

DATE: 09.11.11
CERT. NO.: SH94-14
ISSUE NO.: 4

DESIGN	AJS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED		DRAWING NO.	REV. C
MFG. APPR.	N/A	DSI 9473	SHEET 3 OF 8
APPROVED		TITLE	SCALE
DE APPR.		AUTOMATIC LID OPENER INSTL	NTS
DATE 09.11.11		COPYRIGHT © 2009 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

FOR D350-607-045 BASKETS REPLACE THE EXISTING D2332-041 PROP ARM ASSEMBLY AS FOLLOWS:

D350-607-145 AUTOMATIC LID OPENER INSTALLATION

NOTE: THIS KIT MAY BE INSTALLED AT EITHER END OF THE BASKET. HOWEVER, THE PROP ARM MUST BE REMOVED IN EITHER CASE AS IT WILL INTERFERE WITH THE FUNCTION OF THE GAS SPRING.




- 1) REMOVE THE D2332-041 PROP ARM.
 - 2) GRIND FLUSH THE D2327-3 SPACER BUSHING ON THE END OF THE BASKET WHERE THE LID OPENER IS BE INSTALLED AS SHOWN IN FIGURE 1 (IT IS PERMISSIBLE TO GRIND ALL 4 SPACERS FLUSH). TOUCH UP PAINT PER ICA-D350-607 REV. 0 SECTION 5.1 ITEM 4.
 - 3) LOCATE THE D3953-1 GAS SPRING BRACKET AS SHOWN IN FIGURE 1. TRIM STEEL MESH LOCALLY AS REQUIRED. TOUCH UP PAINT PER ICA-D350-607 REV. 0 SECTION 5.1 ITEM 4. TRANSFER MARK AND DRILL 2X Ø0.194 HOLES THRU THE BASKET LID SQUARE TUBE STRUCTURE AS SHOWN IN DETAIL A. INSTALL THE D3953-1 GAS SPRING BRACKET & D3953-13 GAS SPRING SPACER USING 2X AN3C16A BOLT, 2X NAS1149C0332R WASHER & 2X MS21043-3 NUT AS SHOWN IN VIEW E-E.
 - 4) LOCATE THE D3953-5 GAS SPRING STUD AS SHOWN IN FIGURE 1. TRIM STEEL MESH LOCALLY AS REQUIRED. TOUCH UP PAINT PER ICA-D350-607 REV. 0 SECTION 5.1 ITEM 4. TRANSFER MARK AND DRILL 2X Ø0.194 HOLES THRU THE BASKET BASE SQUARE TUBE STRUCTURE AS SHOWN IN DETAIL B. FASTEN D3953-5 IAW VIEW F-F USING 2X AN3C11A BOLT, 2X NAS1149C0332R WASHER & 2X MS21043-3 NUT.
 - 5) INSTALL 1X D3953-11 GAS SPRING SPACER ONTO THE D3953-5 STUD AS SHOWN IN VIEW F-F. INSTALL THE LARGE END OF THE D3969-1 GAS SPRING SPRING ONTO THE D3953-5 GAS SPRING STUD AND FASTEN IN PLACE USING 1X D3953-9 GAS SPRING WASHER, 1X NAS1149C0432R WASHER, 1X AN310-4 CASTELATTED NUT & 1X MS24665-212 COTTER PIN AS SHOWN IN VIEW F-F. INSTALL COTTER PIN PER MS33540 OR AC43.13 CHAPTER 7-127.
 - 6) INSERT THE D3953-3 GAS SPRING STUD INTO THE D3953-1 GAS SPRING BRACKET & INSERT THE D3953-7 GAS SPRING SPACER ONTO THE D3953-3 GAS SPRING AS SHOWN IN VIEW E-E. RAISE THE BASKET LID AND INSTALL THE ROD END OF THE D3969-1 GAS SPRING ONTO THE D3953-3 GAS SPRING STUD USING 1X D3953-9 GAS SPRING WASHER, 1X NAS1149C0432R WASHER, 1X AN310-4 CASTELATTED NUT & 1X MS24665-212 COTTER PIN AS SHOWN IN VIEW E-E. INSTALL COTTER PIN PER MS33540 OR AC43.13 CHAPTER 7-127.
- NOTE:** THE D3953-3 GAS SPRING STUD CAN BE HELD IN PLACE WITH A $\frac{9}{16}$ OPEN END SPANNER / WRENCH.
- NOTE:** WITH THE LID IN THE CLOSED POSITION THE GAS SPRING SHOULD NOT BE FULLY COMPRESSED.
- 7) TEST THE INSTALLATION. IF INSTALLED PROPERLY THE GAS SPRING SHOULD ASSIST THE BASKET USER IN BOTH OPENING AND CLOSING THE BASKET LID.

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED

BY: 
D. SHEPHERD (DE # 02)

DATE: 09.11.11
CERT. NO.: SH94-14
ISSUE NO.: 4

DESIGN	AJS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED		DRAWING NO.	REV. C
MFG. APPR.	N/A	DSI 9473	SHEET 4 OF 8
APPROVED		TITLE	SCALE
DE APPR.		AUTOMATIC LID OPENER INSTL	NTS
DATE 09.11.11		COPYRIGHT © 2009 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

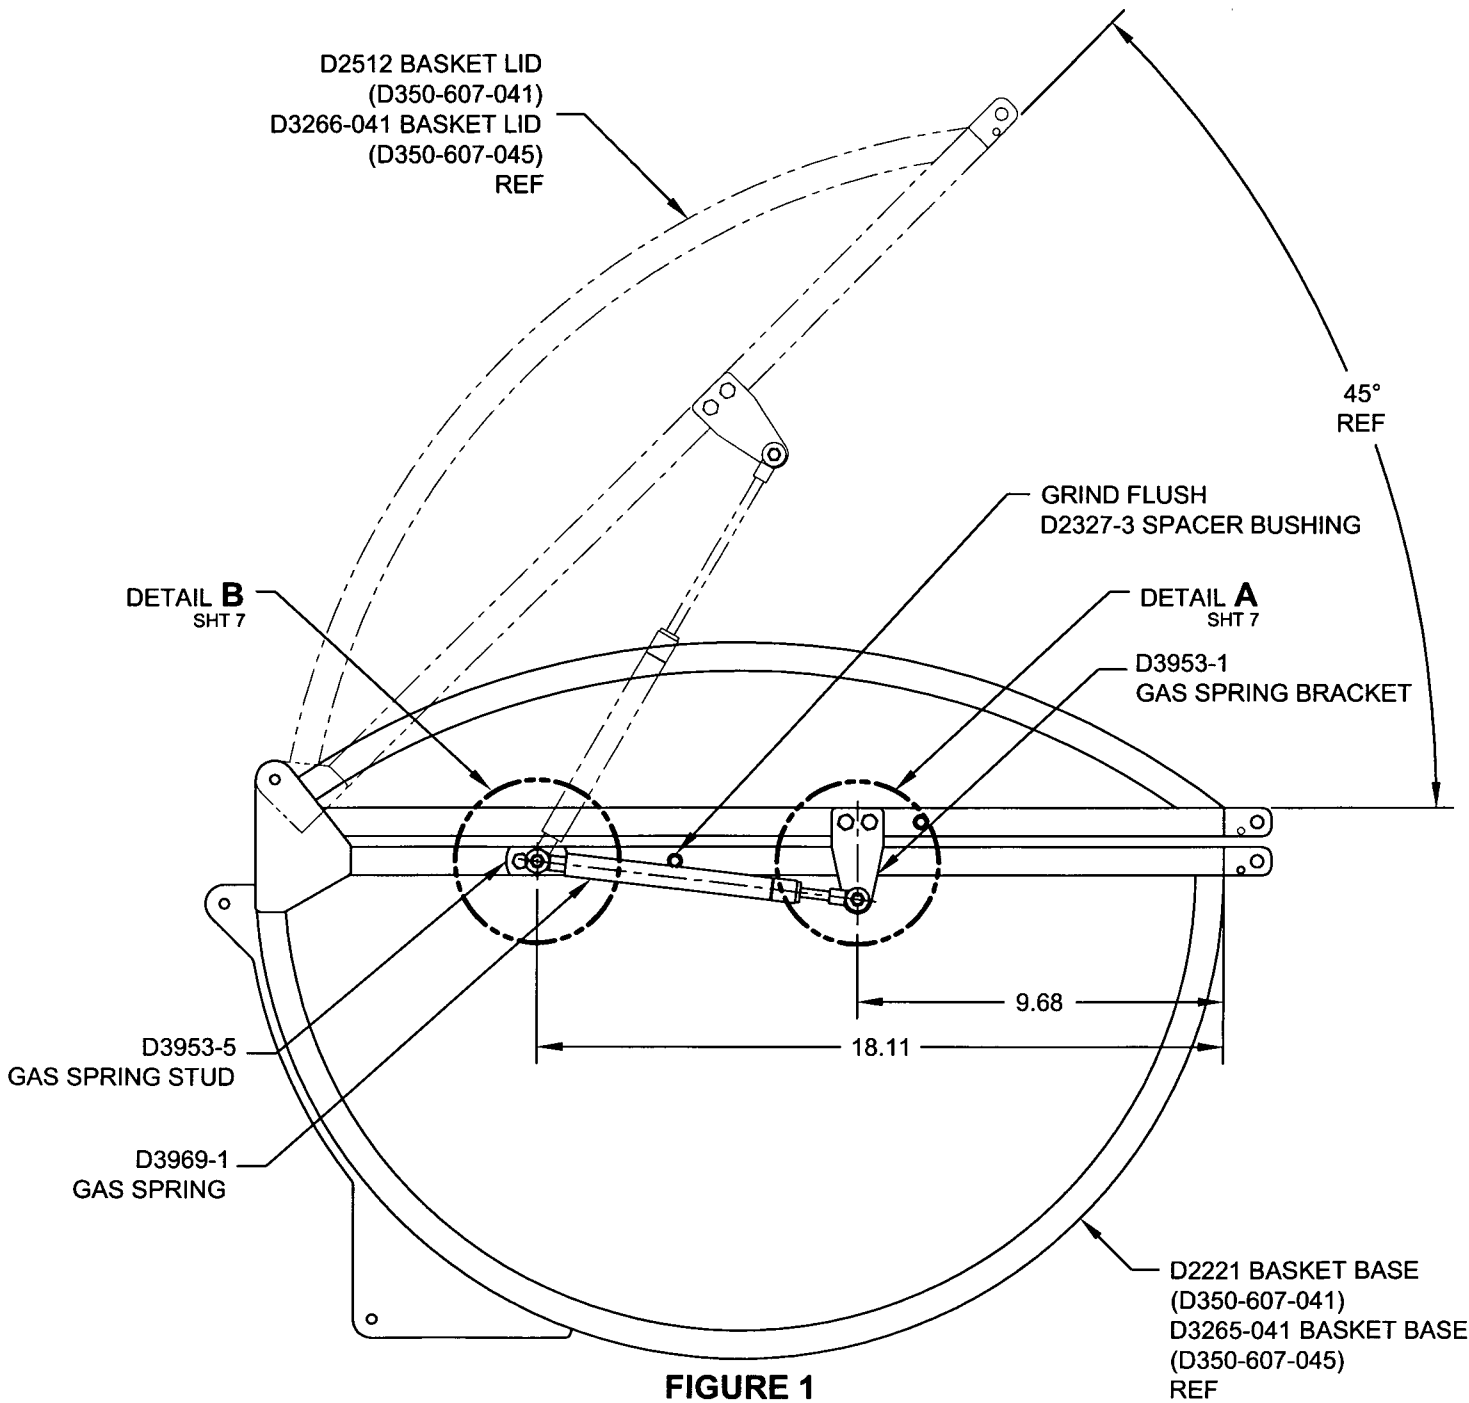





FIGURE 1
D350-607-141 AUTOMATIC LID OPENER INSTALLATION
 (BOTH ENDS)
D350-607-145 AUTOMATIC LID OPENER INSTALLATION
 (1 END ONLY)

CANADA
 DEPARTMENT OF TRANSPORT
 AIRCRAFT CERTIFICATION
 BRANCH
 DAO # 01-O-01

APPROVED
 BY: *[Signature]*
 D. SHEPHERD (DE # 02)

DATE: 09.11.11
 CERT. NO.: SH94-14
 ISSUE NO.: 4

DESIGN	AJS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED		DRAWING NO.	REV. C
MFG. APPR.	N/A	DSI 9473	SHEET 5 OF 8
APPROVED		TITLE	SCALE
DE APPR.		AUTOMATIC LID OPENER INSTL	NTS
DATE	09.11.11	COPYRIGHT © 2009 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

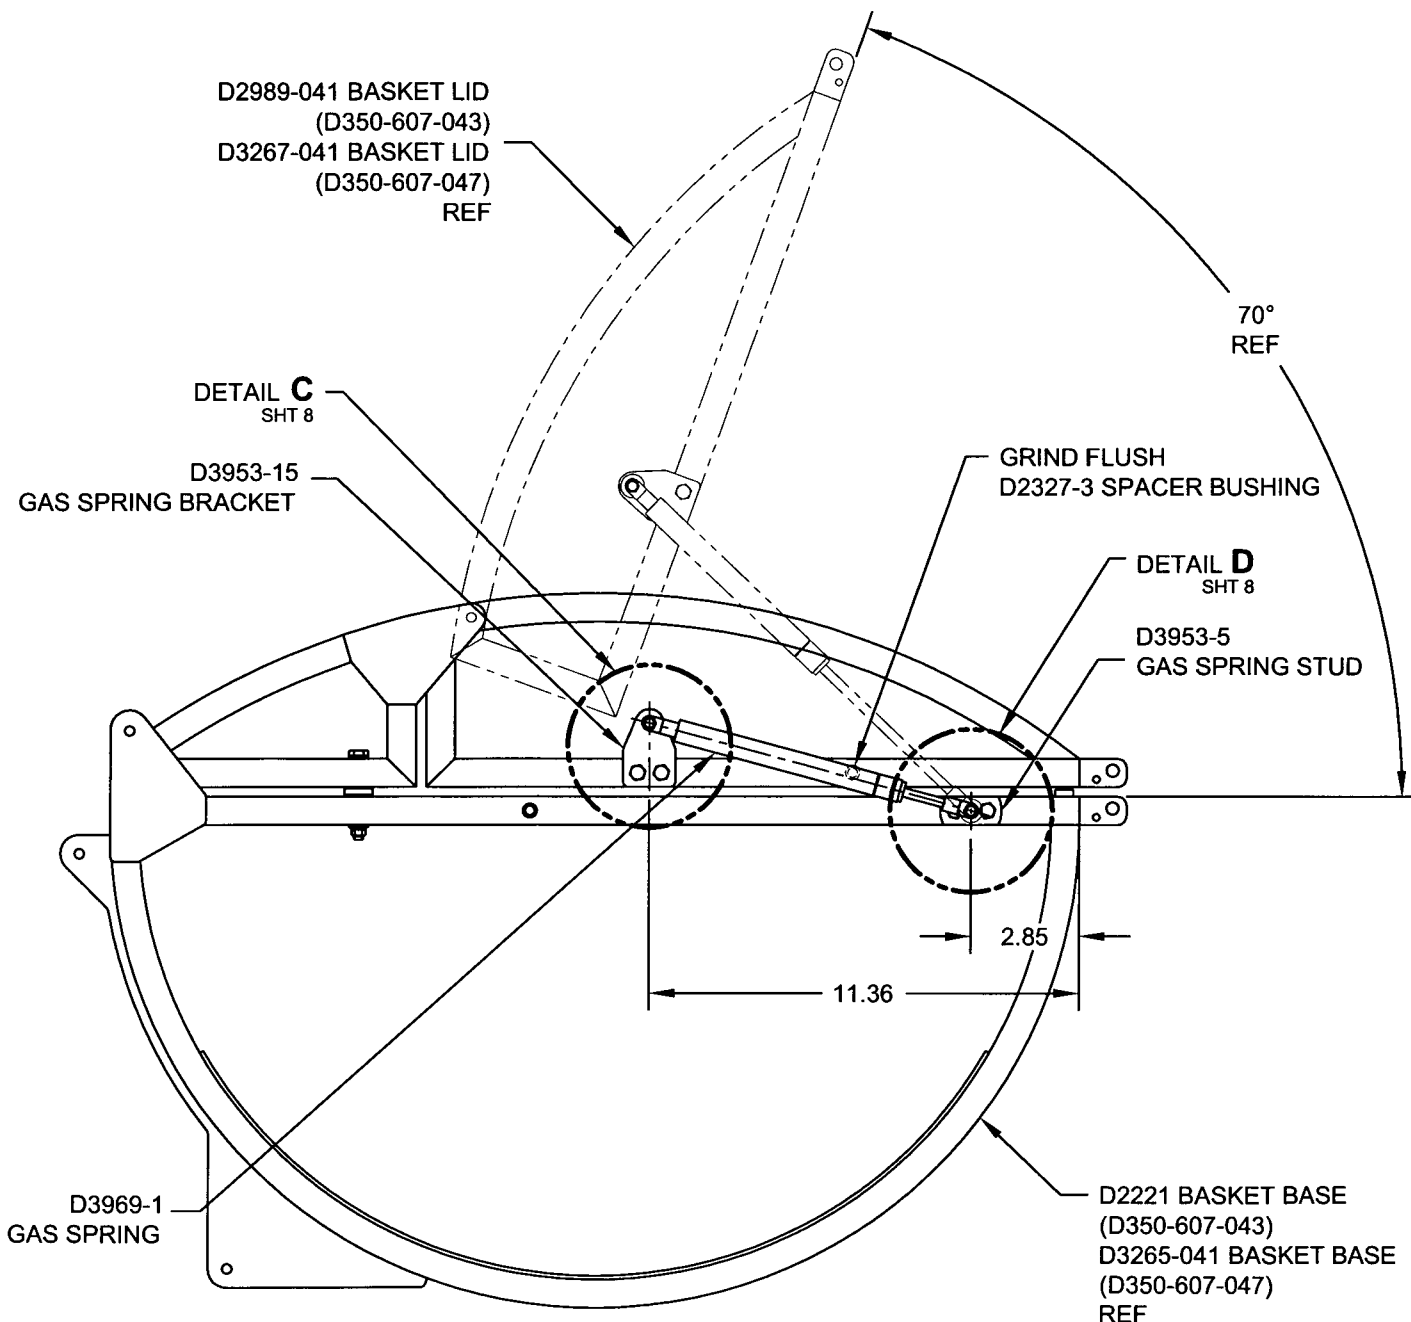


FIGURE 2

D350-607-143 AUTOMATIC LID OPENER INSTALLATION

(1 END ONLY)


CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED


BY: *[Signature]*
D. SHEPHERD (DE # 02)

DATE: 09.11.11
CERT. NO.: SH94-14
ISSUE NO.: 4


DESIGN	AJS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED	<i>[Signature]</i>	DRAWING NO.	REV. C
MFG. APPR.	N/A	DSI 9473	SHEET 6 OF 8
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	AUTOMATIC LID OPENER INSTL	NTS
DATE	09.11.11	COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

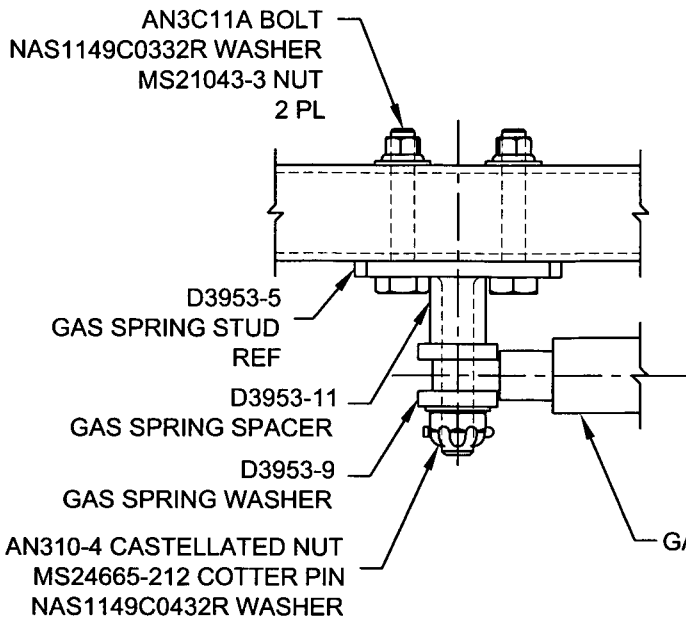


VIEW F-F

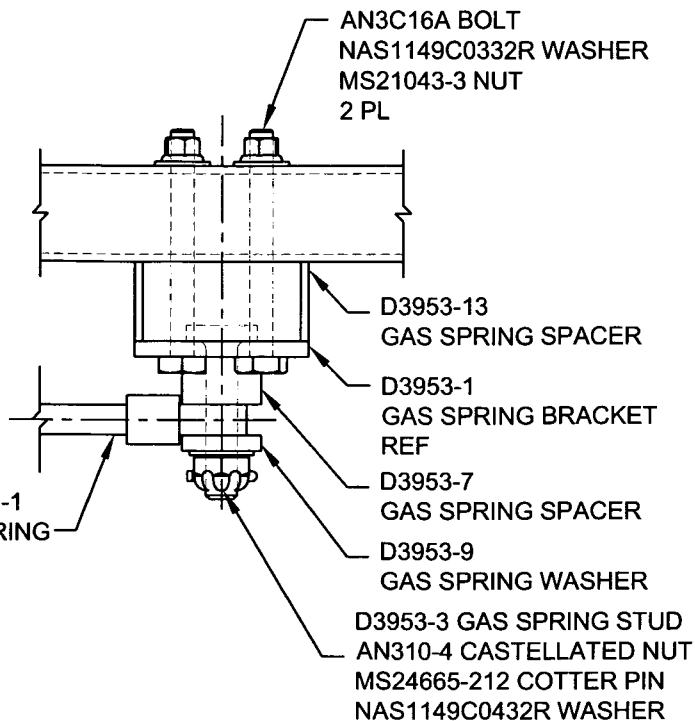

VIEW E-E

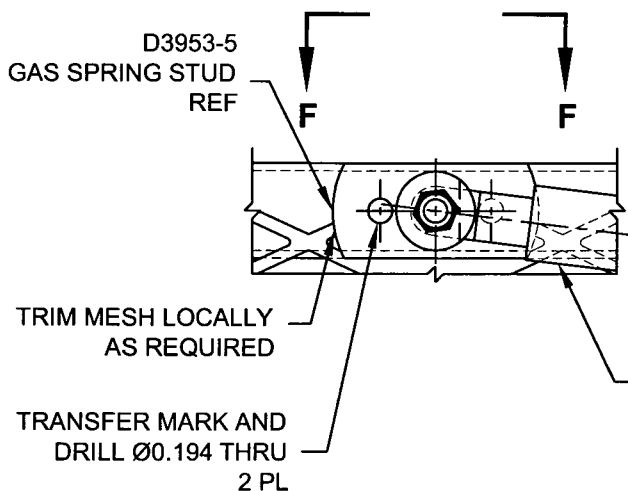

DETAIL B

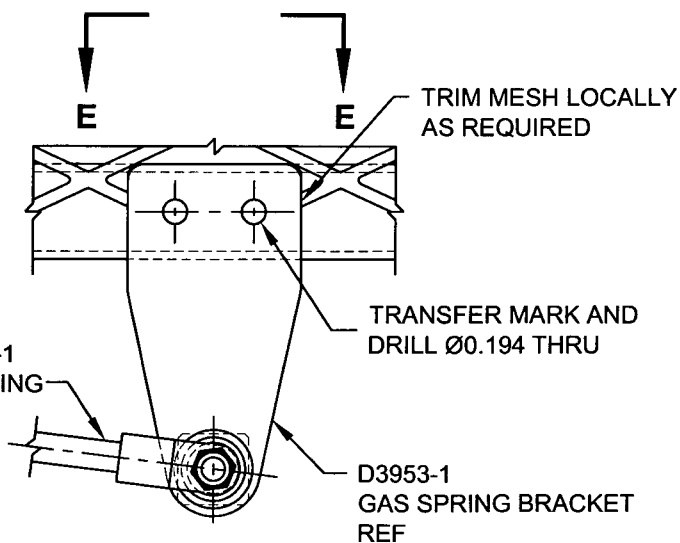




DETAIL A


CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED


BY: *[Signature]*
D. SHEPHERD (DE # 02)

DATE: 09.11.11
CERT. NO.: SH94-14
ISSUE NO.: 4


DESIGN	AJS	DART AEROSPACE LTD	
DRAWN	AJS	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. C
MFG. APPR.	N/A	DSI 9473	SHEET 7 OF 8
APPROVED		TITLE	SCALE
DE APPR.		AUTOMATIC LID OPENER INSTL	NTS
DATE	09.11.11	COPYRIGHT © 2009 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

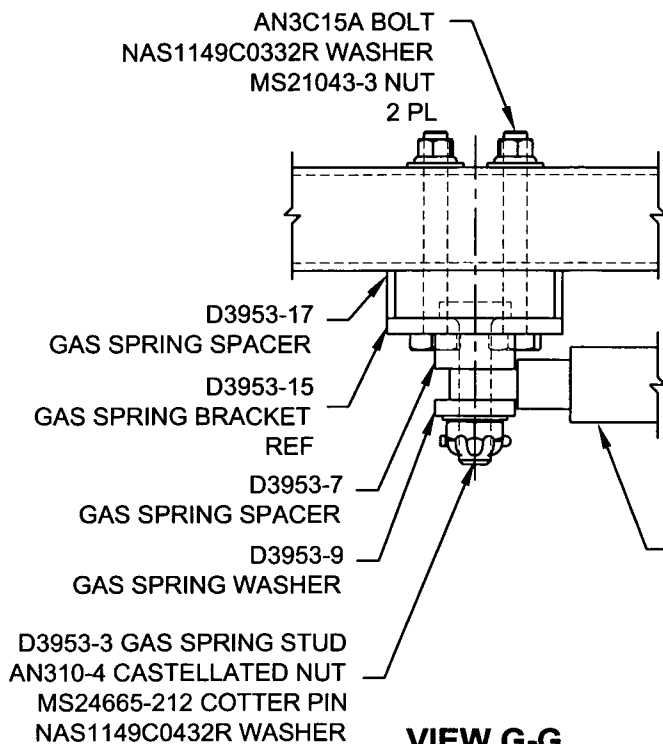


VIEW G-G

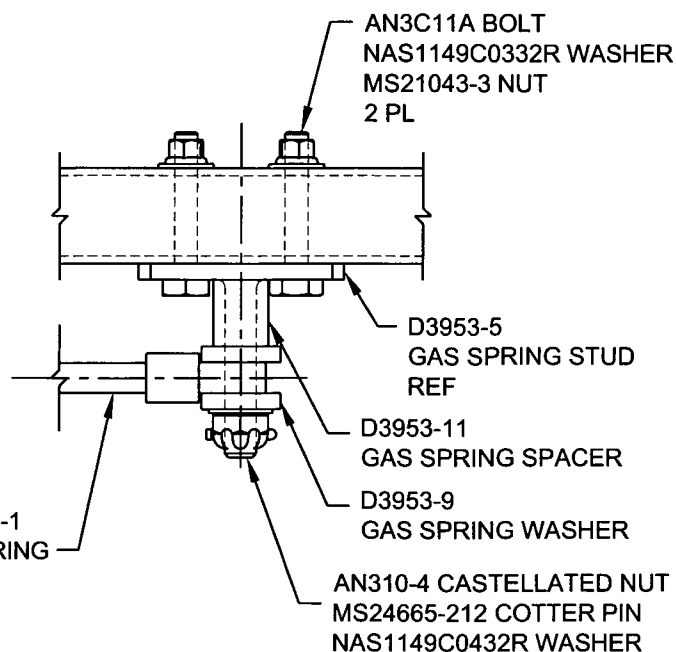

VIEW H-H

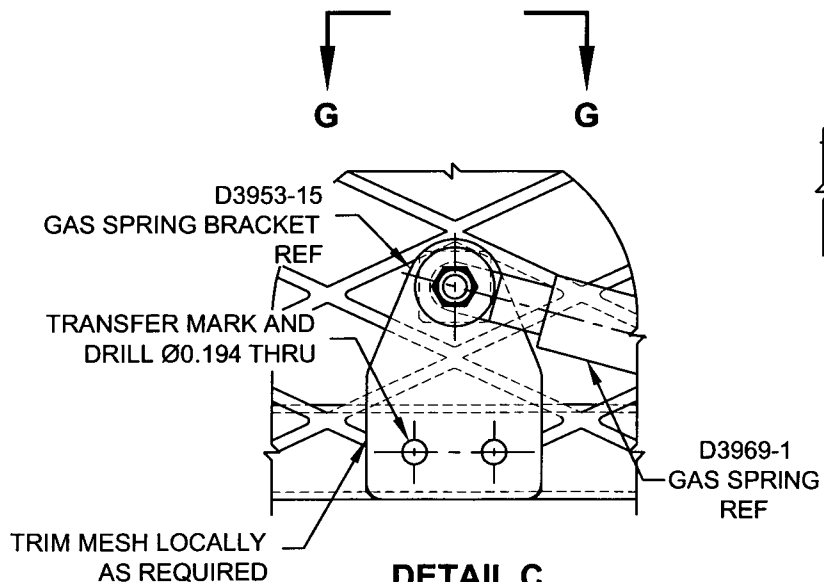

DETAIL C

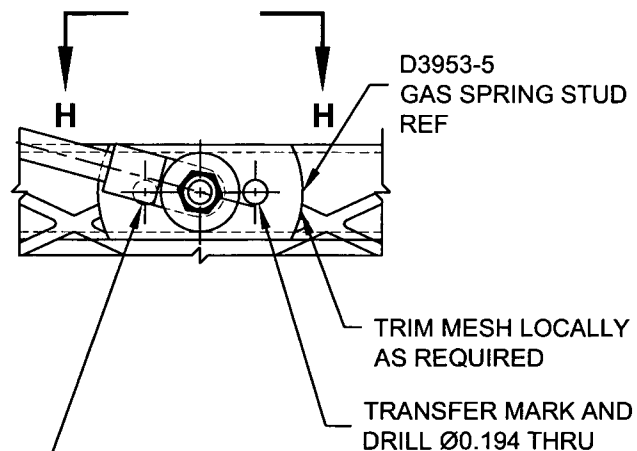

DETAIL D

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED

BY: *[Signature]*
D. SHEPHERD (DE # 02)

DATE: 09.11.11
CERT. NO.: SH94-14
ISSUE NO.: 4

DESIGN	AJS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED	<i>[Signature]</i>	DRAWING NO.	REV. C
MFG. APPR.	N/A	DSI 9473	SHEET 8 OF 8
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	AUTOMATIC LID OPENER INSTL	NTS
DATE	09.11.11	COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	